WALK-IN ELECTRICAL SCHEDULE

ITEM	QTY	DESCRIPTION	MANUFACTURER	MODEL	VOLTS	PHASE	AMPS	KW	HP	ELEC TYPE	AFF	ELECTRICAL COMMENTS	ITEM
01	1	REFRIGERATION RACK	OMNI		208	3	19.9			DIR		VERIFY LOCATION OF ROUGH-INS	01
02	1	WALK-IN COOLER / FREEZER ASSEMBLY	AMERICAN PANEL	CUSTOM		1						(2 @ 120V AT 8.0 AMPS EA.) STUB DOWN. SEE DETAIL "5" SHEET FS-2 FOR WIRING DIAGRAM	02
05	1	UNDERCOUNTER DISHMACHINE (HIGH TEMP)	CHAMPION	UH-100B	208	3	29.0			JBOX	18"		05
14	1	COFFEE MAKER (OPERATOR FURNISHED)	FETCO	CBS-2152XTS		1	22.5			REC	48"	(120/208V) 3 WIRE + GROUND. VERIFY REQUIREMENTS WITH OPERATOR SUPPLIED EQUIPMENT	14
16	1	CONVECTION OVEN (VENTLESS)	MOFFAT (TURBOFAN)	E33D5H2	208	1	27.8			REC	48"		16
18	1	WORKTOP REFRIGERATOR	TRUE FOOD SERVICE	TWT-67-SPEC1	120	1	5.1			REC	18"		18
20	1	CONVECTION OVEN (VENTLESS) (OPTIONAL)	MOFFAT (TURBOFAN)	E33D5H2	208	1	27.8			REC	48"		20
22	1	MICROWAVE OVEN (BELOW)	AMANA	HDC12A2	120	1	16.8			REC	48"		22
24	1	WAFFLE MAKER (OPERATOR FURNISHED)	WELLS	BWB-1SE	120	1	7.5			REC	18"	STUB OUT, TO FIXTURE MOUNTED OUTLET (BY ELECTRICAL DIVISION), VERIFY REQUIREMENTS WITH OPERATOR SUPPLIED EQUIPMENT	24
25	1	WAFFLE MAKER (FUTURE) (OPERATOR FURNISHED)	WELLS	BWB-1SE	120	1	7.5			REC	18"	STUB OUT, TO FIXTURE MOUNTED OUTLET (BY ELECTRICAL DIVISION) ,VERIFY REQUIREMENTS WITH OPERATOR SUPPLIED EQUIPMENT, VERIFY ALL ELECTRICAL REQUIREMENTS WITH FUTURE EQUIPMENT	25
26	1	CONVEYOR TOASTER	APW WYOTT	ECO 4000-350L-HILTON	120	1	14.4			REC	18"	STUB OUT, TO FIXTURE MOUNTED OUTLET (BY ELECTRICAL DIVISION)	26
27	1	DISPLAY SHOWCASE	EQUIPEX	WD780B-2/1	120	1	15.0			REC	18"	STUB OUT, TO FIXTURE MOUNTED OUTLET (BY ELECTRICAL DIVISION)	27
28	1	JUICE DISPENSER (BY VENDOR)	BUNN-O-MATIC	JDF-4	120	1	6.0			REC	48"	VERIFY REQUIREMENTS WITH VENDOR SUPPLIED EQUIPMENT	28
29	1	WARMING KETTLE	VOLLRATH	72017	120	1	6.7			REC	48"		29
31	1	UNDERCOUNTER DISPLAY REFRIGERATOR	TRUE	TUC-27G-ADA-HC–FGD01	120	1	2.0			REC	18"		31
32	1	UNIT COOLER (COOLER)	OMNITEMP		120	1	2.0			JBOX		STUB DOWN. SEE DETAIL "5" SHEET FS-2 FOR WIRING DIAGRAM	32
33	1	UNIT COOLER (FREEZER)	OMNI		208	1	1.8			JBOX		STUB DOWN. SEE DETAIL "5" SHEET FS-2 FOR WIRING DIAGRAM	33
35	1	REACH-IN DISPLAY FREEZER	TRUE	TS-23FG-HC–FGD01	120	1	6.2			REC	18"		35
36	1	REACH-IN DISPLAY REFRIGERATOR	TRUE	TSD-47G-HC-LD	120	1	8.5			REC	18"		36
37	1	WATER DISPENSER	VIVREAU	VI-TAP-1H		1				REC	18"	(2 @ 120V AT 11.0 AMPS AND 13.0 AMPS)	37

CONVENIENCE OUTLET REQUIREMENTS


ITEM	DESCRIPTION	VOLTS	PH	AMPS	ELE TYPE	AFF	ELECTRICAL COMMENTS
901	CONVENIENCE RECEPTACLE	120	1	15.0	REC	+48"	CONVENIENCE OUTLET STUB OUT WALL

EQUIPMENT SCHEDULE - BREAKFAST & SERVERY


23	1	BATTER MIX STARTER KIT (OPERATOR FURNISHED)		
24	1	WAFFLE MAKER (OPERATOR FURNISHED)	WELLS	BWB-1SE
25	1	WAFFLE MAKER (FUTURE) (OPERATOR FURNISHED)	WELLS	BWB-1SE
26	1	CONVEYOR TOASTER	APW WYOTT	ECO 4000-350L-HILTON
27	1	DISPLAY SHOWCASE	EQUIPEX	WD780B-2/1
28	1	JUICE DISPENSER (BY VENDOR)	BUNN-O-MATIC	JDF-4
29	1	WARMING KETTLE	VOLLRATH	72017
30	1	CEREAL DISPENSER	SERVER PRODUCTS	88920
31	1	UNDERCOUNTER DISPLAY REFRIGERATOR	TRUE	TUC-27G-ADA-HC–FGD01

LEGEND - ELECTRICAL FIXTURE


PLAN	DESCRIPTION
	OUTLET - DUPLEX
	OUTLET - DUPLEX - GFI
	OUTLET - QUAD
	OUTLET - QUAD - GFI
	PHONE
	DATA
	OUTLET - TV
J	J BOX
	OUTLET - SPECIAL PURPOSE, GROUND TYPE
T	THERMOSTAT
S	LIQUID LINE SELENOID

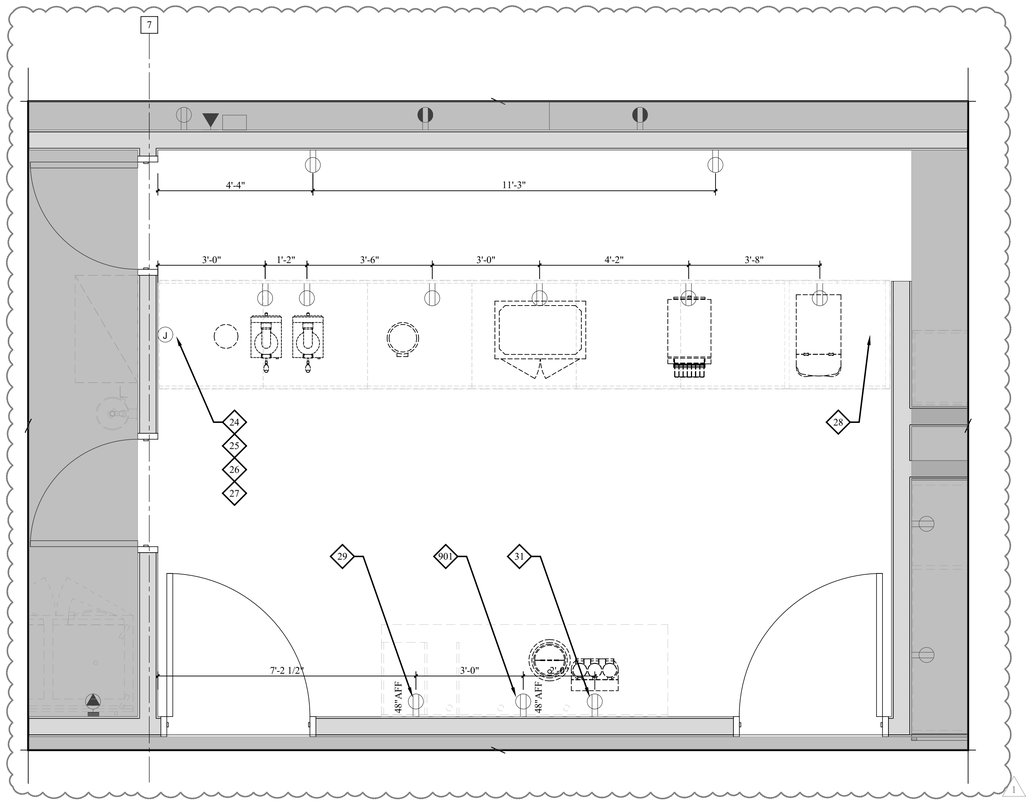

2 BREAKFAST & SERVERY ELEC. PLAN
1/2" = 1'-0"

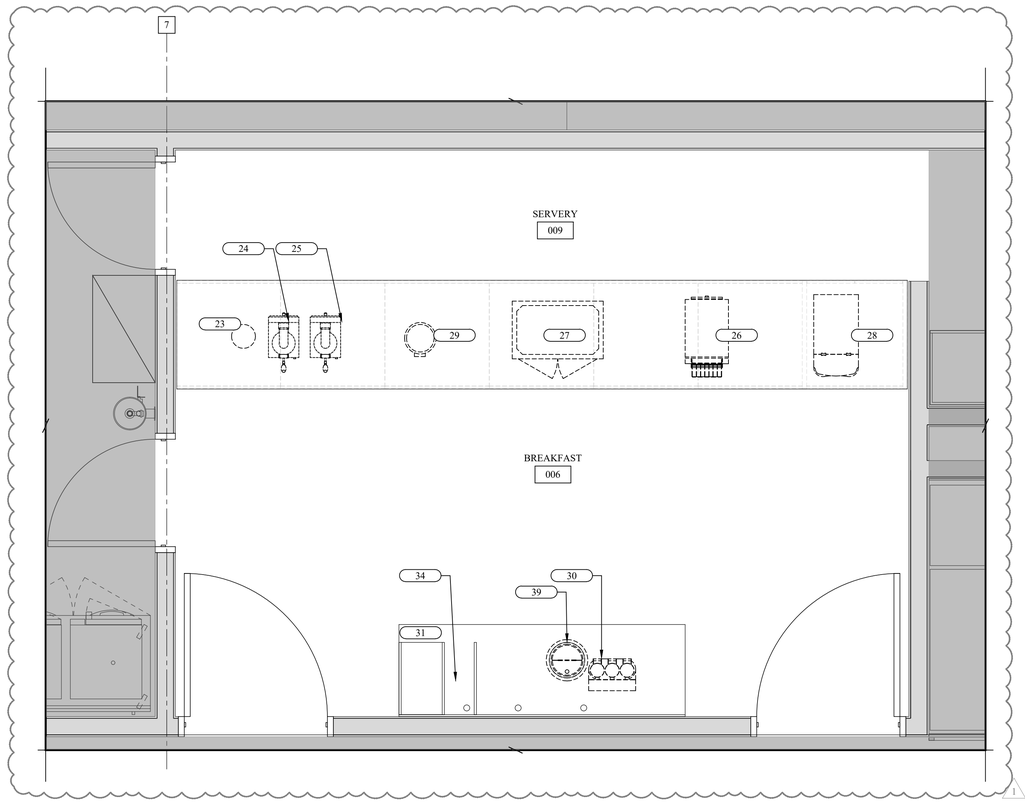

1 BREAKFAST & SERVERY EQUIPMENT PLAN
1/2" = 1'-0"



KEY PLAN
N.T.S

IMPORTANT NOTICE TO ALL CONTRACTORS AND OR SUBCONTRACTORS: (COMPLETE BUILDING SYSTEMS AND OR INSTALLATIONS)

IF AWARDED A CONTRACT FOR ANY PORTION OF WORK NEEDED TO COMPLETE THIS PROJECT YOU ARE AGREEING TO THE FOLLOWING TERMS:

1. YOU ARE A QUALIFIED CONTRACTOR AND OR SUBCONTRACTOR SPECIFICALLY IN PROVIDING A COMPLETE TURNKEY SERVICE IN YOUR TRADE OR PROFESSION FOR THE TYPE OF WORK AND SCOPE FOR THIS PROJECT.
2. YOU AGREE TO PROVIDE A COMPLETE DESIGN BUILD SOLUTION BASED ON THE ARCHITECTS INTENDED DESIGN FOR THIS PROJECT.
3. YOUR BID INCLUDED ALL THE STEPS, PROCESSES, MATERIALS, PRODUCTS, GOVERNING PERMITS AND APPROVALS NECESSARY TO PROVIDE A COMPLETED AND WARRANTED SYSTEM OR INSTALLATION THAT DOES NOT REQUIRED ANOTHER CONTRACTOR OR PRODUCT TO COMPLETE YOUR SCOPE OF WORK.
4. YOUR BID MUST HAVE INCLUDED ANY DESIGN INFORMATION REFERENCED WITHIN ANY CIVIL, ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL AND OR PLUMBING DRAWINGS; ALSO NOTE THESE DRAWINGS ARE SCHEMATIC AND ARE INTENDED TO SHOW ONLY BASIC CONCEPTS AND GENERAL INFORMATION. THE COMPLETION OF YOUR WORK MAY INCLUDE OTHER STEPS, PROCESSES, MATERIALS, PRODUCTS, LABOR, GOVERNING PERMITS AND OR APPROVALS NECESSARY TO PROVIDE A COMPLETE SYSTEM INSTALLATION WHETHER SUGGESTED ON THE DRAWINGS OR NOT.
5. AS AN EXAMPLE: ITEMS AND OR TASKS LIKE; FIRE CAULK, DRAFT STOPS, FASTENERS, ANCHORS, EMBEDMENTS, DUMPSTERS, DEBRIS CLEAN UP, ETC. ARE YOUR RESPONSIBILITY. ANY WORK NOT COMPLETED IN A TIMELY MANNER, OR INCOMPLETE WORK WILL BE BILLED BACK TO THE CONTRACTOR AND OR SUBCONTRACTOR, AT THE OWNERS' DISCRETION.

MWT

3827 BILLO ROAD
ALDEN, NY, 14004
716-631-0600
ARCHITECT OF RECORD

DONALD M. EDWARD
LICENSE #: 20212
10800 ALABASTER DR.
DAVIDSON, NC 28036
donedwardarchitect@gmail.com



04/20/2023

WARNING
IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE ARCHITECT OR ENGINEER, TO ALTER OR REPRODUCE THESE DRAWINGS IN ANY WAY.

DRAWING QUESTIONS
CA@MWTUSA.COM
1-800-717-5816

ISSUED FOR :

CONSTRUCTION AND BID SET

HOME2 SUITES BY HILTON

EAGLE PASS, TX 78852
PROTOTYPE VERSION: 3.0

REVISIONS

NO.	DESCRIPTION	DATE	BY
1	FF&E FRANCHISE UPDATE	08/04/23	-

PROJECT NO.: 22-014

DATE: 06/09/23

DRAWN BY: RH/BS

CHKD. BY: AS

ENLARGED BREAKFAST & SERVERY

SHEET
A514

22-014 A514 ENLARGED BREAKFAST & SERVERY.dwg