BATHROOM KEYED NOTES :

1	WALL MOUNTED GRAB BARS W/ REQUIRED CLEARANCES - 12" ABOVE AND 1-1/2" BELOW. REFER TO ACCESSIBILITY STANDARDS & HADG.
6	ACCESSIBLE VANITY UNIT, REFER TO FURNITURE DWGS.
7	ACCESSIBLE REMOVABLE TUB/SHOWER SEAT. SHOWER SEAT IS WALL MOUNTED. REFER TO ACCESSIBILITY STANDARDS AND HADG FOR REQUIREMENTS
8	CLEAR AREA OF SINK/VANITY MUST BE ACCESSIBLE
9	SHOWER HEAD
10	SHOWER DIVERTER VALVE
11	HAND SHOWER AND SIDE BAR. HAND-HELD SHOWER UNIT REQUIRED TO HAVE ON/OFF CONTROL WITH NON-POSITIVE SHUT OFF.
12	VANITY MIRROR AND LIGHT FIXTURE
13	GFCI OUTLET
14	ON/OFF - PRESSURE BALANCING VALVE
19	TOILET
20	FLOOR DRAIN LOCATION - MAINTAIN ACCESSIBLE COMPLIANT SLOPES TO DRAIN.
21	LEVER REQUIRED ON THE SIDE OF TANK OPPOSITE INSIDE CORNER OF WALL
23	FRAMING SUBCONTRACTOR TO PROVIDE 3/4" F.R.T. PLYWOOD BLOCKING TO RECEIVE ITEM INDICATED - EXTEND FULL LENGTH OF OBJECT
25	SHOWER SURROUND
28	LED NIGHT LIGHT INTEGRATED WITH EITHER LIGHT SWITCH OR OUTLET
26	SOAP DISPENSERS
27	DOOR STOP HARDWARE REQUIRED TO KEEP HARDWARE AT BACK OF DOOR FROM HITTING GLASS WHEN FULLY AJAR
29	BI-PASS SLIDING GLASS DOOR, BRUSHED ALUMINUM FINISH, CLEAR GLASS, WITH 24" BAR PULL HARDWARE
29	PROVIDE HINGE STOP AT DOOR
30	VANITY SHELF

GENERAL NOTES - GUESTROOMS

A. REFER TO FF&E PACKAGE FOR FURNITURE, BUILT-IN MILLWORK & FINISH SPECS

B. SMOKE DETECTORS, SPRINKLERS, AND OTHER EMERGENCY DEVICES TO BE LOCATED PER LOCAL CODE- INDICATED FOR DESIGN INTENT ONLY

C. PROVIDE EMERGENCY LIGHTING PER LOCAL CODE

D. A.F.F. WALL RECEPTACLES/DATA PORTS TO E MOUNTED @ 12" TYPICAL U.N.O - REFER ALSO TO HADG

E. REFER TO HOME 2 SUITES BY HILTON STANDARDS MANUAL FOR ADDITIONAL GUESTROOM, GUESTROOM BATH, GUESTROOM KITCHEN & INDOOR POOL REQ'S

F. ALL CONTROLS FOR USE BY GUESTS MUST BE MOUNTED @ B/T 15"A.F.F. & 48" A.F.F. & PROVIDE A 30"X48" CLEAR FLOOR AREA IN COMPLIANCE W/ ACCESSIBLE STANDARDS. OPERABLE CONTROLS LOCATED OVER AN OBSTRUCTION DEEPER THAN 10" MUST BE MOUNTED NO HIGHER THAN 46" A.F.F. -ACCESSIBLE CONTROLS MUST NOT REQUIRE TIGHT GRASPING, PINCHING OR TWISTING OF THE WRIST. ACCESSIBLE CONTROLS SHALL COMPLY W/ THE HADG

G. IN ACCESSIBLE ROOMS AT LEAST ONE OUTLET & DATA CONNECTION FOR USE BY GUEST MUST BE MOUNTED B/T 15" & 48" A.F.F. AND PROVIDE A CLEAR FLOOR AREA IN COMPLIANCE W/ ACCESSIBLE STANDARDS. SEE HADG FOR FURTHER REQ'S.

H. OBJECTS MOUNTED W/IN THE CIRCULATION PATH IN ACCESSIBLE ROOMS B/T 27" & 80" A.F.F. SHALL NOT PROTRUDE FARTHER THAN 4" FROM WALL REFER TO HADG FOR FURTHER REQ'S


I. FOR ALL ITEMS MOUNTED TO THE WALL (SHELVES, FF&E, MIRRORS, ART, ETC.; PROVIDE BLOCKING AS REQUIRED

BATHROOM ACCESSORIES NOTES :


HD-01	TOILET PAPER ROLL HOLDER
HD-02	SINGLE TOILET PAPER HOLDER
HD-03	TOILET TISSUE DISPENSER
HD-04	TOWEL HOOK
HD-05 & HD-5.1	SHOWER ROD BOWED & STRAIGHT
HD-06	GRAB BAR ADA
HD-08	GRAB BAR ADA 24" VERTICAL MOUNT
HD-09	GRAB BAR ADA 24" HORIZONTAL MOUNT
HD-10	GRAB BAR ADA 22" HORIZONTAL MOUNT
HD-11	GRAB BAR ADA 36" HORIZONTAL MOUNT
HD-12	ROBE/COAT HOOK
HD-13	AUTOMATIC PAPER TOWEL DISPENSER SURPACE MOUNTED
HD-14	FOLDING RECTAGULAR SHOWER SEAT SURFACE MOUNTED
HD-15	SOAP DISPENSER SURFACE MOUNTED POOL RESTROOMS
HD-16	SHOWER SOAP DISPENSER SURFACE MOUNTED GUESTROOM
HD-17	PAPER TOWEL/SOAP DISPENSER RECESSED
HD-18	SHOWER FOOTREST SURFACE MOUNTED
HD-19	RECESSED WASTE RECEPTACLE PUBLIC & POOL RESTROOM
HD-20	GRAB BAR ADA 12" HORIZONTAL MOUNT
HD-21	SOAP DISH SURFACE MOUNTED
HD-22	TOWEL BAR 24"

(XXX) FURNISHINGS LEGEND:


GR-100	OTTOMAN
GR-101	SLEEPER SOFA
GR-102	DINING CHAIR
GR-103	TASK CHAIR
GR-200	SIDE TABLE LAMP
GR-201	DESK LAMP
GR-202	NIGHTSTAND SCONCE
GR-203	VANITY SCONE
GR-204	SCONE @WALL HOOK
GR-205	FLOOR LAMP
GR-206	TABLE LAMP @ACCESSIBLE WORKING WALL
GR-207	NIGHTSTAND SCONE @QUEEN QUEEN CENTER
GR-208	NIGHTSTAND SCONCE @QUEEN QUEEN SIDE
GR-300	QUEEN HEADBOARD
GR-301	KING HEADBOARD
GR-302	VANITY @GUEST BATH (LEFT&RIGHT)
GR-303	ACCESSIBLE VANITY @GUEST BATH
GR-304 -316	WORKING WALL
GR-317	DINING TABLE @ONE BEDROOM SUITE
GR-318	SOFA TABLE @SOFA
GR-319	NIGHTSTAND @RIGHT
GR-320	DECORATIVE SHELVES ABOVE DESK
GR-321	WALL SHELF @BATHROOM
GR-322	NIGHTSTAND @QUEEN QUEEN
GR-323	NIGHTSTAND @LEFT
GR-324	WALL SHELF @ACCESSIBLE BATHROOM
GR-400	BLACKOUT & SHEER ROLLER SHADE
GR-401	MOTORIZED ROLLER SHADE
GR-402	DIVIDER DRAPERY
GR-402.1	DIVIDER DRAPERY HARDWARE
GR-403	CLOSET DRAPERY
GR-404	ADA CLOSET DRAPERY @GUEST SUITE
GR-500	ART ABOVE SOFA
GR-501	VANITY MIRROR
GR-502	FULL LENGTH MIRROR
GR-503	ART ABOVE DINING TABLE @ONEBEDROOM SUITE
GR-600	QUEEN MATTRESS SET
GR-600.1	QUEEN BOX SPRING COVER
GR-601	KING MATTRESS SET
GR-601.1	KING BOX SPRING COVER
GR-602	QUEEN BED BASE
GR-602.ADA	QUEEN ACCESSIBLE BED BASE
GR-603	KING BED BASE
GR-603.ADA	KING ACCESSIBLE BED BASE
GR-603.1	KING BED SKIRT
901	REFRIGERATOR
902	DISHWASHER
903	TELEVISION
904	CLOCK/RADIO
905	TELEPHONE
906	TUB SHOWER CURTAIN
907	SHOWER CURTAIN




03i INTERIOR ELEVATION
1/2" = 1'-0"




03 INTERIOR ELEVATION
1/2" = 1'-0"

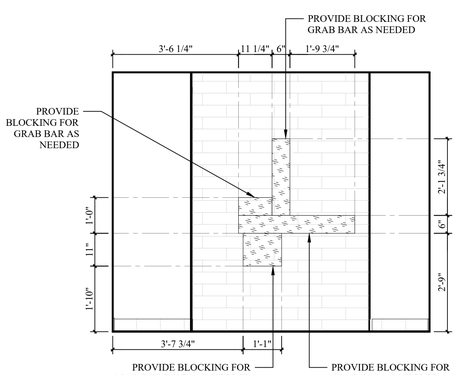


02i INTERIOR ELEVATION
1/2" = 1'-0"

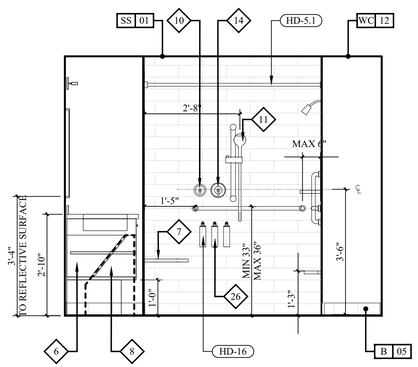

02 INTERIOR ELEVATION
1/2" = 1'-0"

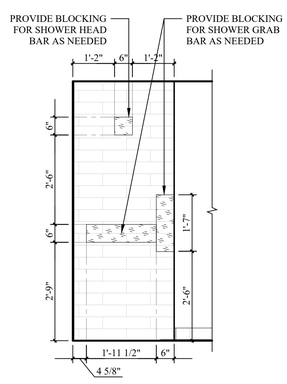

01i INTERIOR ELEVATION
1/2" = 1'-0"

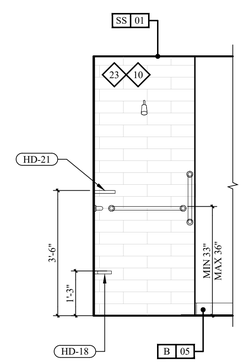

01 INTERIOR ELEVATION
1/2" = 1'-0"

IMPORTANT NOTICE TO ALL CONTRACTORS AND OR SUBCONTRACTORS: (COMPLETE BUILDING SYSTEMS AND OR INSTALLATIONS)

IF AWARDED A CONTRACT FOR ANY PORTION OF WORK NEEDED TO COMPLETE THIS PROJECT YOU ARE AGREEING TO THE FOLLOWING TERMS:

1. YOU ARE A QUALIFIED CONTRACTOR AND OR SUBCONTRACTOR SPECIFICALLY IN PROVIDING A COMPLETE TURNKEY SERVICE IN YOUR TRADE OR PROFESSION FOR THE TYPE OF WORK AND SCOPE FOR THIS PROJECT.
2. YOU AGREE TO PROVIDE A COMPLETE DESIGN BUILD SOLUTION BASED ON THE ARCHITECTS INTENDED DESIGN FOR THIS PROJECT.
3. YOUR BID INCLUDED ALL THE STEPS, PROCESSES, MATERIALS, PRODUCTS, GOVERNING PERMITS AND APPROVALS NECESSARY TO PROVIDE A COMPLETED AND WARRANTED SYSTEM OR INSTALLATION THAT DOES NOT REQUIRED ANOTHER CONTRACTOR OR PRODUCT TO COMPLETE YOUR SCOPE OF WORK.
4. YOUR BID MUST HAVE INCLUDED ANY DESIGN INFORMATION REFERENCED WITHIN ANY CIVIL, ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL AND OR PLUMBING DRAWINGS. ALSO NOTE THESE DRAWINGS ARE SCHEMATIC AND ARE INTENDED TO SHOW ONLY BASIC CONCEPTS AND GENERAL INFORMATION. THE COMPLETION OF YOUR WORK MAY INCLUDE OTHER STEPS, PROCESSES, MATERIALS, PRODUCTS, LABOR, GOVERNING PERMITS AND OR APPROVALS NECESSARY TO PROVIDE A COMPLETE SYSTEM INSTALLATION WHETHER SUGGESTED ON THE DRAWINGS OR NOT.
5. AS AN EXAMPLE: ITEMS AND OR TASKS LIKE: FIRE CAULK, DRAFT STOPS, FASTENERS, ANCHORS, EMBEDMENTS, DUMPSTERS, DEBRIS CLEAN UP, ETC. ARE YOUR RESPONSIBILITY. ANY WORK NOT COMPLETED IN A TIMELY MANNER, OR INCOMPLETE WORK WILL BE BILLED BACK TO THE CONTRACTOR AND OR SUBCONTRACTOR, AT THE OWNERS' DISCRETION.

MWT

3827 BILLO ROAD
ALDEN, NY, 14004
716-631-0600
ARCHITECT OF RECORD

DONALD M. EDWARD
LICENSE #: 20212
10800 ALABASTER DR.
DAVIDSON, NC 28036
donedwardarchitect@gmail.com

LICENSED ARCHITECT DONALD MICHAEL EDWARD 20212 STATE OF TEXAS

08/09/2024

WARNING
IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE ARCHITECT OR ENGINEER, TO ALTER OR REPRODUCE THESE DRAWINGS IN ANY WAY.

DRAWING QUESTIONS
CA@MWTUSA.COM
1-800-717-5816

ISSUED FOR :

CONSTRUCTION AND BID SET

HOME 2 SUITES BY HILTON

EAGLE PASS, TX 78852
PROTOTYPE VERSION: 3.0

REVISIONS

NO.	DESCRIPTION	DATE	BY
1	FF&E FRANCHISE UPDATE	-	-
2	PER STRUCTURAL UPDATE	-	-
3	REVISED PER CITY COMMENT	-	-
4	REVISED	08/09/24	-

PROJECT NO.: 22-014
DATE: 08/09/24
DRAWN BY: BS
CHKD. BY: AS

ENL. BATHROOM - KING STD.ACC., KING STD.ACC.MOD., & QQ ACC.

SHEET
A532.1