| | |
|---|---|
| | BATHROOM KEYED NOTES : |
| 1 | WALL MOUNTED GRAB BARS W/ REQUIRED CLEARANCES - 12" ABOVE AND 1-1/2" BELOW. REFER TO ACCESSIBILITY STANDARDS & HADG. |
| 6 | ACCESSIBLE VANITY UNIT, REFER TO FURNITURE DWGS. |
| 7 | ACCESSIBLE REMOVABLE TUB/SHOWER SEAT. SHOWER SEAT IS WALL MOUNTED. REFER TO ACCESSIBILITY STANDARDS AND HADG FOR REQUIREMENTS |
| 8 | CLEAR AREA OF SINK/VANITY MUST BE ACCESSIBLE |
| 9 | SHOWER HEAD |
| 10 | SHOWER DIVERTER VALVE |
| 11 | HAND SHOWER AND SIDE BAR. HAND-HELD SHOWER UNIT REQUIRED TO HAVE ON/OFF CONTROL WITH NON-POSITIVE SHUT OFF. |
| 12 | VANITY MIRROR AND LIGHT FIXTURE |
| 13 | GFCI OUTLET |
| 14 | ON/OFF - PRESSURE BALANCING VALVE |
| 19 | TOILET |
| 20 | FLOOR DRAIN LOCATION - MAINTAIN ACCESSIBLE COMPLIANT SLOPES TO DRAIN. |
| 21 | LEVER REQUIRED ON THE SIDE OF TANK OPPOSITE INSIDE CORNER OF WALL |
| 23 | FRAMING SUBCONTRACTOR TO PROVIDE 3/4" F.R.T. PLYWOOD BLOCKING TO RECEIVE ITEM INDICATED - EXTEND FULL LENGTH OF OBJECT |
| 25 | SHOWER SURROUND |
| 28 | LED NIGHT LIGHT INTEGRATED WITH EITHER LIGHT SWITCH OR OUTLET |
| 29 | SOAP DISPENSERS |
| 27 | DOOR STOP HARDWARE REQUIRED TO KEEP HARDWARE AT BACK OF DOOR FROM HITTING GLASS WHEN FULLY AJAR |
| 26 | BI-PASS SLIDING GLASS DOOR, BRUSHED ALUMINUM FINISH, CLEAR GLASS, WITH 24" BAR PULL HARDWARE |
| 29 | PROVIDE HINGE STOP AT DOOR |
| 30 | VANITY SHELF |

GENERAL NOTES - GUESTROOMS

A. REFER TO FF&E PACKAGE FOR FURNITURE, BUILT-IN MILLWORK & FINISH SPECS

B. SMOKE DETECTORS, SPRINKLERS, AND OTHER EMERGENCY DEVICES TO BE LOCATED PER LOCAL CODE- INDICATED FOR DESIGN INTENT ONLY

C. PROVIDE EMERGENCY LIGHTING PER LOCAL CODE

D. A.F.F. WALL RECEPTACLES/DATA PORTS TO E MOUNTED @ 12" TYPICAL U.N.O - REFER ALSO TO HADG

E. REFER TO HOME 2 SUITES BY HILTON STANDARDS MANUAL FOR ADDITIONAL GUESTROOM, GUESTROOM BATH, GUESTROOM KITCHEN & INDOOR POOL REQ'S

F. ALL CONTROLS FOR USE BY GUESTS MUST BE MOUNTED @ B/T 15"A.F.F. & 48" A.F.F. & PROVIDE A 30"X48" CLEAR FLOOR AREA IN COMPLIANCE W/ ACCESSIBLE STANDARDS. OPERABLE CONTROLS LOCATED OVER AN OBSTRUCTION DEEPER THAN 10" MUST BE MOUNTED NO HIGHER THAN 46" A.F.F. -ACCESSIBLE CONTROLS MUST NOT REQUIRE TIGHT GRASPING, PINCHING OR TWISTING OF THE WRIST. ACCESSIBLE CONTROLS SHALL COMPLY W/ THE HADG

G. IN ACCESSIBLE ROOMS AT LEAST ONE OUTLET & DATA CONNECTION FOR USE BY GUEST MUST BE MOUNTED B/T 15" & 48" A.F.F. AND PROVIDE A CLEAR FLOOR AREA IN COMPLIANCE W/ ACCESSIBLE STANDARDS. SEE HADG FOR FURTHER REQ'S.

H. OBJECTS MOUNTED W/IN THE CIRCULATION PATH IN ACCESSIBLE ROOMS B/T 27" & 80" A.F.F. SHALL NOT PROTRUDE FARTHER THAN 4" FROM WALL REFER TO HADG FOR FURTHER REQ'S

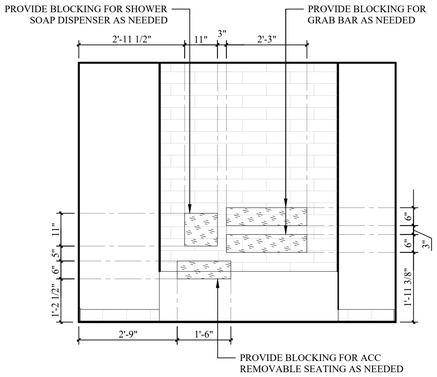
I. FOR ALL ITEMS MOUNTED TO THE WALL ( SHELVES, FF&E, MIRRORS, ART, ETC.; PROVIDE BLOCKING AS REQUIRED

BATHROOM ACCESSORIES NOTES :

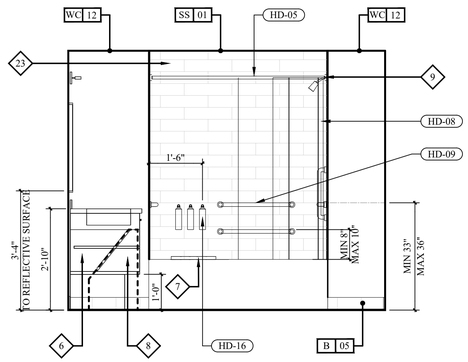
| | |
|---|---|
| HD-01 | TOILET PAPER ROLL HOLDER |
| HD-02 | SINGLE TOILET PAPER HOLDER |
| HD-03 | TOILET TISSUE DISPENSER |
| HD-04 | TOWEL HOOK |
| HD-05 & HD-5.1 | SHOWER ROD BOWED & STRAIGHT |
| HD-06 | GRAB BAR ADA |
| HD-08 | GRAB BAR ADA 24" VERTICAL MOUNT |
| HD-09 | GRAB BAR ADA 24" HORIZONTAL MOUNT |
| HD-10 | GRAB BAR ADA 22" HORIZONTAL MOUNT |
| HD-11 | GRAB BAR ADA 36" HORIZONTAL MOUNT |
| HD-12 | ROBE/COAT HOOK |
| HD-13 | AUTOMATIC PAPER TOWEL DISPENSER SURPACE MOUNTED |
| HD-14 | FOLDING RECTAGULAR SHOWER SEAT SURFACE MOUNTED |
| HD-15 | SOAP DISPENSER SURFACE MOUNTED POOL RESTROOMS |
| HD-16 | SHOWER SOAP DISPENSER SURFACE MOUNTED GUESTROOM |
| HD-17 | PAPER TOWEL/SOAP DISPENSER RECESSED |
| HD-18 | SHOWER FOOTREST SURFACE MOUNTED |
| HD-19 | RECESSED WASTE RECEPTACLE PUBLIC & POOL RESTROOM |
| HD-20 | GRAB BAR ADA 12" HORIZONTAL MOUNT |
| HD-21 | SOAP DISH SURFACE MOUNTED |
| HD-22 | TOWEL BAR 24" |

XXX FURNISHINGS LEGEND:

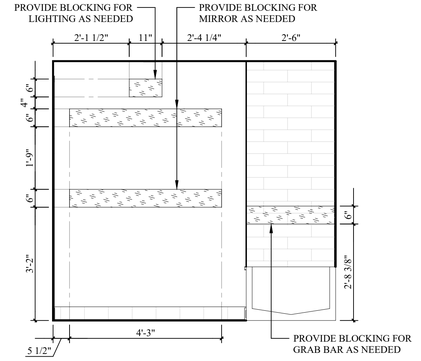
| | |
|---|---|
| GR-100 | OTTOMAN |
| GR-101 | SLEEPER SOFA |
| GR-102 | DINING CHAIR |
| GR-103 | TASK CHAIR |
| GR-200 | SIDE TABLE LAMP |
| GR-201 | DESK LAMP |
| GR-202 | NIGHTSTAND SCONCE |
| GR-203 | VANITY SCONE |
| GR-204 | SCONE @WALL HOOK |
| GR-205 | FLOOR LAMP |
| GR-206 | TABLE LAMP |
| | @ACCESSIBLE WORKING WALL |
| GR-207 | NIGHTSTAND SCONE |
| | @QUEEN QUEEN CENTER |
| GR-208 | NIGHTSTAND SCONCE |
| | @QUEEN QUEEN SIDE |
| GR-300 | QUEEN HEADBOARD |
| GR-301 | KING HEADBOARD |
| GR-302 | VANITY |
| | @GUEST BATH (LEFT&RIGHT) |
| GR-303 | ACCESSIBLE VANITY |
| | @GUEST BATH |
| GR-304 -316 | WORKING WALL |
| GR-317 | DINING TABLE |
| | @ONE BEDROOM SUITE |
| GR-318 | SOFA TABLE @SOFA |
| GR-319 | NIGHTSTAND @RIGHT |
| GR-320 | DECORATIVE SHELVES ABOVE DESK |
| GR-321 | WALL SHELF @BATHROOM |
| GR-322 | NIGHTSTAND @QUEEN QUEEN |
| GR-323 | NIGHTSTAND @LEFT |
| GR-324 | WALL SHELF |
| | @ACCESSIBLE BATHROOM |
| GR-400 | BLACKOUT & SHEER ROLLER SHADE |
| GR-401 | MOTORIZED ROLLER SHADE |
| GR-402 | DIVIDER DRAPERY |
| GR-402.1 | DIVIDER DRAPERY HARDWARE |
| GR-403 | CLOSET DRAPERY |
| GR-404 | ADA CLOSET DRAPERY |
| | @GUEST SUITE |
| GR-500 | ART ABOVE SOFA |
| GR-501 | VANITY MIRROR |
| GR-502 | FULL LENGTH MIRROR |
| GR-503 | ART ABOVE DINING TABLE |
| | @ONEBEDROOM SUITE |
| GR-600 | QUEEN MATTRESS SET |
| GR-600.1 | QUEEN BOX SPRING COVER |
| GR-601 | KING MATTRESS SET |
| GR-601.1 | KING BOX SPRING COVER |
| GR-602 | QUEEN BED BASE |
| GR-602.ADA | QUEEN ACCESSIBLE BED BASE |
| GR-603 | KING BED BASE |
| GR-603.ADA | KING ACCESSIBLE BED BASE |
| GR-603.1 | KING BED SKIRT |
| 901 | REFRIGERATOR |
| 902 | DISHWASHER |
| 903 | TELEVISION |
| 904 | CLOCK/RADIO |
| 905 | TELEPHONE |
| 906 | TUB SHOWER CURTAIN |
| 907 | SHOWER CURTAIN |



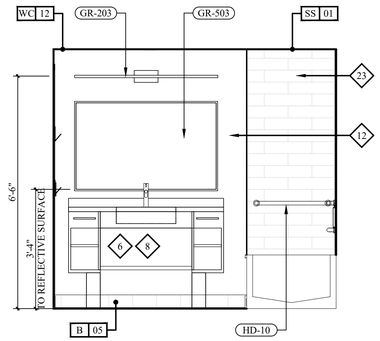

05i INTERIOR ELEVATION
1/2" = 1'-0"



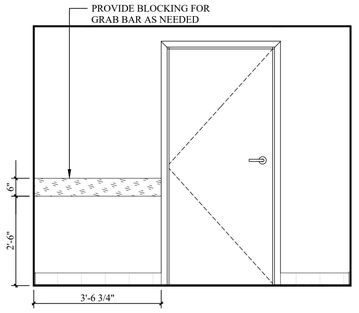

05 INTERIOR ELEVATION
1/2" = 1'-0"



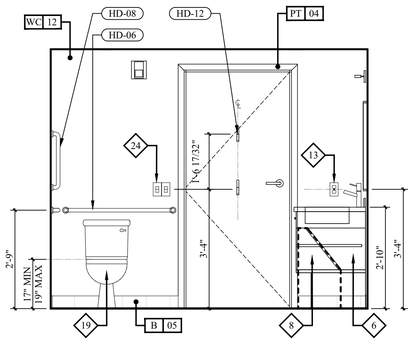

04i INTERIOR ELEVATION
1/2" = 1'-0"



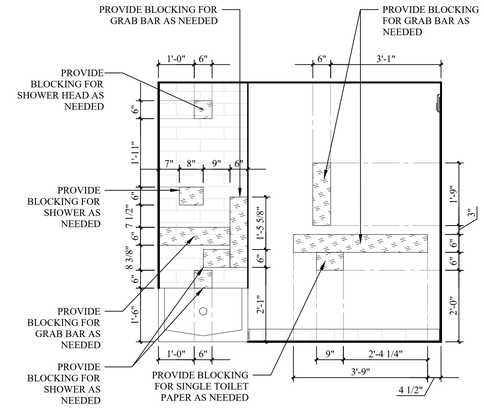

04 INTERIOR ELEVATION
1/2" = 1'-0"



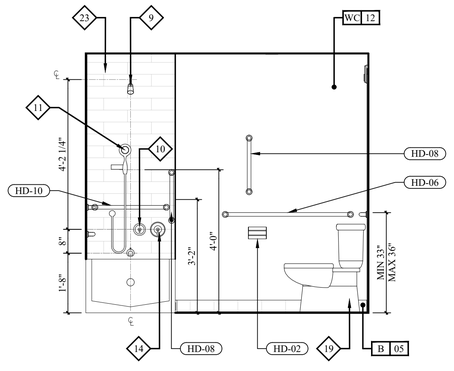

03i INTERIOR ELEVATION
1/2" = 1'-0"



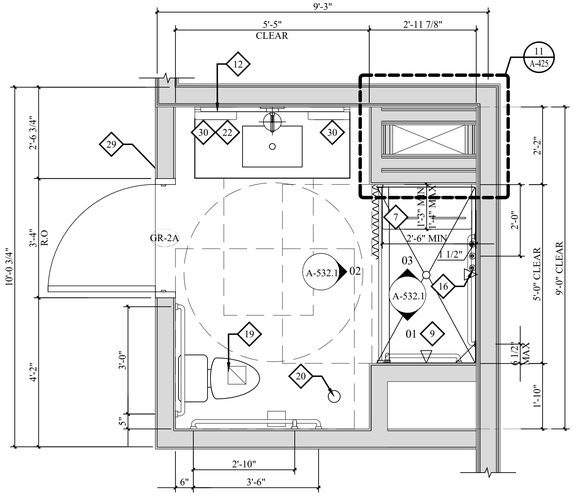

03 INTERIOR ELEVATION
1/2" = 1'-0"



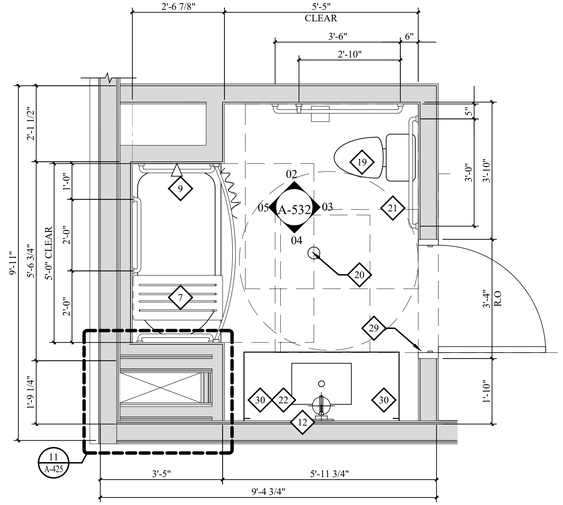

02i INTERIOR ELEVATION
1/2" = 1'-0"




02 INTERIOR ELEVATION
1/2" = 1'-0"




01.1 PLAN - ROLL IN SHOWER
1/2" = 1'-0"




01 PLAN - TUB
1/2" = 1'-0"

**IMPORTANT NOTICE TO ALL CONTRACTORS AND OR SUBCONTRACTORS: (COMPLETE BUILDING SYSTEMS AND OR INSTALLATIONS)**

**IF AWARDED A CONTRACT FOR ANY PORTION OF WORK NEEDED TO COMPLETE THIS PROJECT YOU ARE AGREEING TO THE FOLLOWING TERMS:**

1. YOU ARE A QUALIFIED CONTRACTOR AND OR SUBCONTRACTOR SPECIFICALLY IN PROVIDING A COMPLETE TURNKEY SERVICE IN YOUR TRADE OR PROFESSION FOR THE TYPE OF WORK AND SCOPE FOR THIS PROJECT.
2. YOU AGREE TO PROVIDE A COMPLETE DESIGN BUILD SOLUTION BASED ON THE ARCHITECTS INTENDED DESIGN FOR THIS PROJECT.
3. YOUR BID INCLUDED ALL THE STEPS, PROCESSES, MATERIALS, PRODUCTS, GOVERNING PERMITS AND APPROVALS NECESSARY TO PROVIDE A COMPLETED AND WARRANTED SYSTEM OR INSTALLATION THAT DOES NOT REQUIRED ANOTHER CONTRACTOR OR PRODUCT TO COMPLETE YOUR SCOPE OF WORK.
4. YOUR BID MUST HAVE INCLUDED ANY DESIGN INFORMATION REFERENCED WITHIN ANY CIVIL, ARCHITECTURAL, STRUCTURAL, MECHANICAL, ELECTRICAL AND OR PLUMBING DRAWINGS; ALSO NOTE THESE DRAWINGS ARE SCHEMATIC AND ARE INTENDED TO SHOW ONLY BASIC CONCEPTS AND GENERAL INFORMATION. THE COMPLETION OF YOUR WORK MAY INCLUDE OTHER STEPS, PROCESSES, MATERIALS, PRODUCTS, LABOR, GOVERNING PERMITS AND OR APPROVALS NECESSARY TO PROVIDE A COMPLETE SYSTEM INSTALLATION WHETHER SUGGESTED ON THE DRAWINGS OR NOT.
5. AS AN EXAMPLE: ITEMS AND OR TASKS LIKE; FIRE CAULK, DRAFT STOPS, FASTENERS, ANCHORS, EMBEDMENTS, DUMPSTERS, DEBRIS CLEAN UP, ETC. ARE YOUR RESPONSIBILITY. ANY WORK NOT COMPLETED IN A TIMELY MANNER, OR INCOMPLETE WORK WILL BE BILLED BACK TO THE CONTRACTOR AND OR SUBCONTRACTOR, AT THE OWNERS' DISCRETION.


MWT

3827 BILLO ROAD
ALDEN, NY, 14004
716-631-0600
ARCHITECT OF RECORD

DONALD M. EDWARD
LICENSE #: 20212
10800 ALABASTER DR.
DAVIDSON, NC 28036
donedwardarchitect@gmail.com


REGISTERED ARCHITECT DONALD MICHAEL EDWARD 20212 STATE OF TEXAS

08/09/2024


WARNING
IT IS A VIOLATION OF THE LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF THE ARCHITECT OR ENGINEER, TO ALTER OR REPRODUCE THESE DRAWINGS IN ANY WAY.


DRAWING QUESTIONS
CA@MWTUSA.COM
1-800-717-5816

ISSUED FOR :

CONSTRUCTION AND BID SET

HOME 2 SUITES BY HILTON

EAGLE PASS, TX 78852
PROTOTYPE VERSION: 3.0

REVISIONS

| NO. | DESCRIPTION | DATE | BY |
|---|---|---|---|
| 1 | FF&E FRANCHISE UPDATE | - | - |
| 2 | PER STRUCTURAL UPDATE | - | - |
| 3 | REVISED PER CITY COMMENT | - | - |
| 4 | REVISED | 08/09/24 | - |

PROJECT NO.: 22-014
DATE: 08/09/24
DRAWN BY: BS
CHKD. BY: AS

ENL. BATHROOM - KING STD.ACC., KING STD.ACC.MOD., & QQ ACC.

SHEET
A532

4 22-014 A532 ENLARGE UNIT BATHROOM.dwg